

Mustang tiles

Deling	1/10 loop pile	ISO 2424
Poolsamenstelling	100% PA SDN	ISO 2424
Tuftdoek	Non Woven	ISO 2424
Rug	Bitumen	ISO 2424
Breedte	50x50 cm ± 0,2%	EN 984
Pooldichtheid	0,139 gr/cm ³	ISO 8543
Poolgewicht	550 gr/m ²	ISO 8543
Totaalgewicht	Bitumen : 4300 gr/m ² ± 15%	ISO 8543
Poolhoogte	3 mm ± 2 mm	ISO 1766
Totale hoogte	Bitumen : 5 mm	ISO 1765
Aantal noppen	189.600 /m ² -7.5% .+10%	ISO 1763
Brandclassificatie	Bfl-S1	EN 13501-1
Gebruikzone	Heavy project use (33)	EN 1307
Gut nr.	F7FCFD0C	www.pro-dis.info
Akoestisch geluiddempingsgraad	Ca. 0,15 αW	ISO 11654
Geluidsisolatie	ca. 25 dB	ISO 10140
Warmtedoorlaatbaarheid	ca. 0,07 (0,7 TOG) M ² KW	ISO 8302
Lichtechtheid	≥ 5	105-B02
Wrijftechtheid	≥ 4	105-X12
Waterechtheid	≥ 4	105-E01
Statische oplading	<2 kV	ISO 6356
Comfortklasse	LC2	EN 1307
Foto's	www.condorcontract.com	


Floorsymbols



Certificaten

CE
2018
Condor Carpets
Euroweg 3
8061 SB Hasselt
EN1307
DOP: C-022RBM236
Reaction to fire:
Bfl-s1
Slip resistance: DS
Resilient floor
covering to be
used within a
building



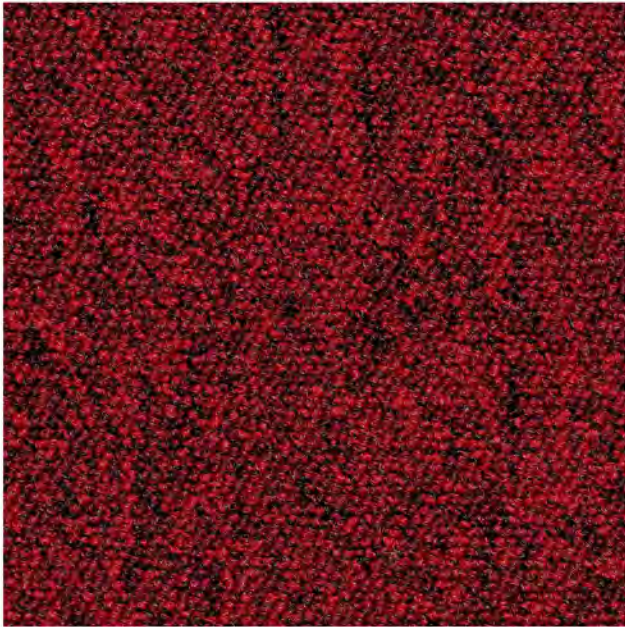


Packshot 20




Packshot 41




Packshot 70

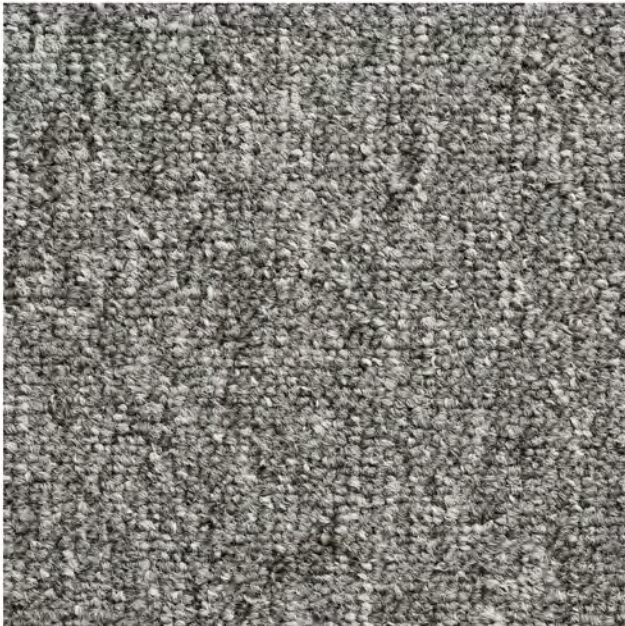


Packshot 73

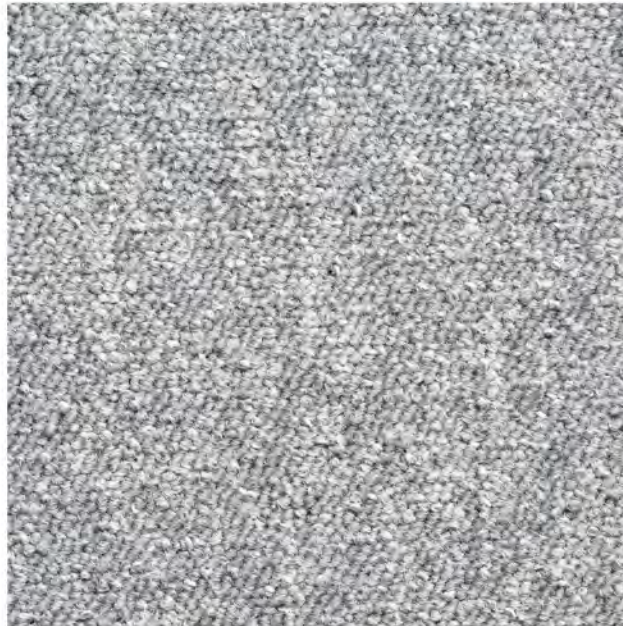


Packshot 74

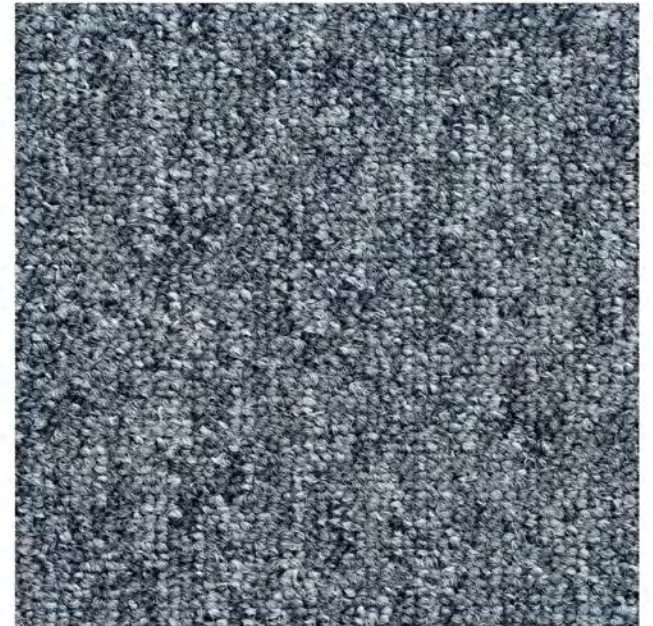

Packshot 75

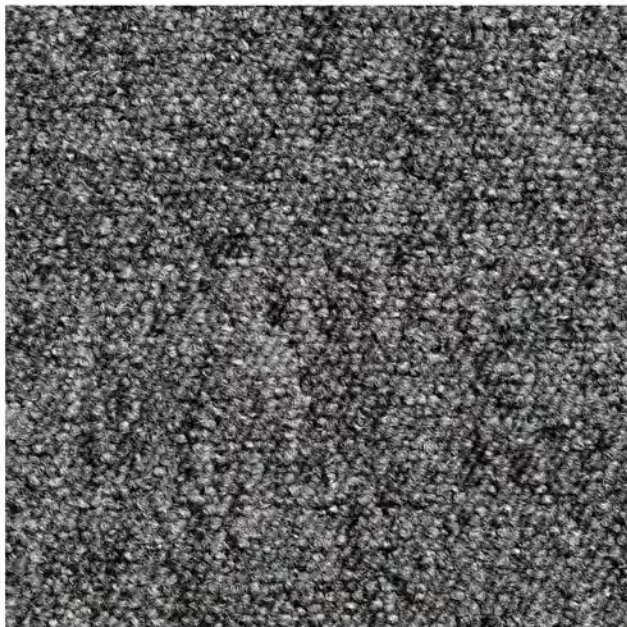

Packshot 76

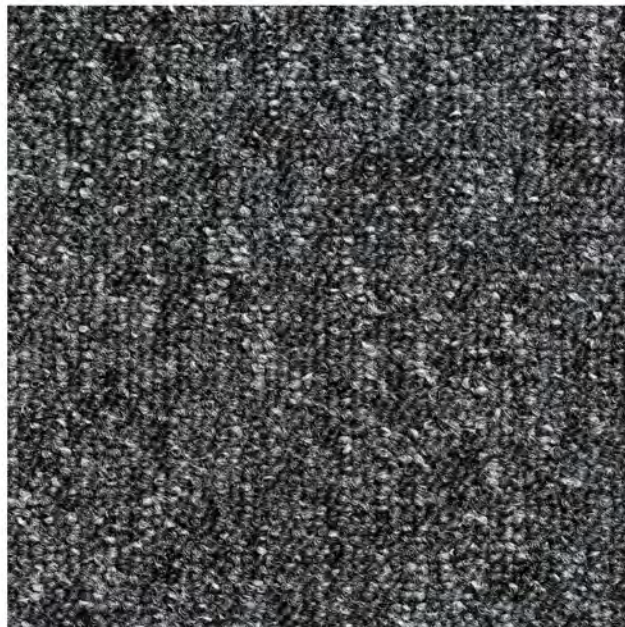


Packshot 77




Packshot 78



Packshot 80

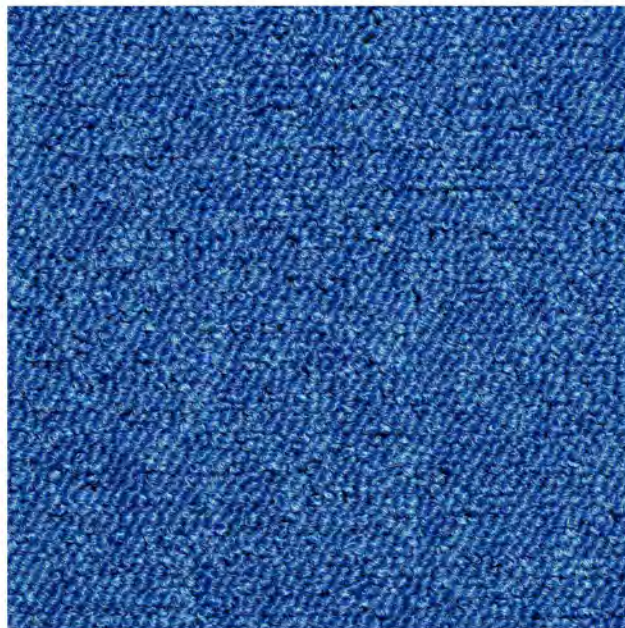

Packshot 82

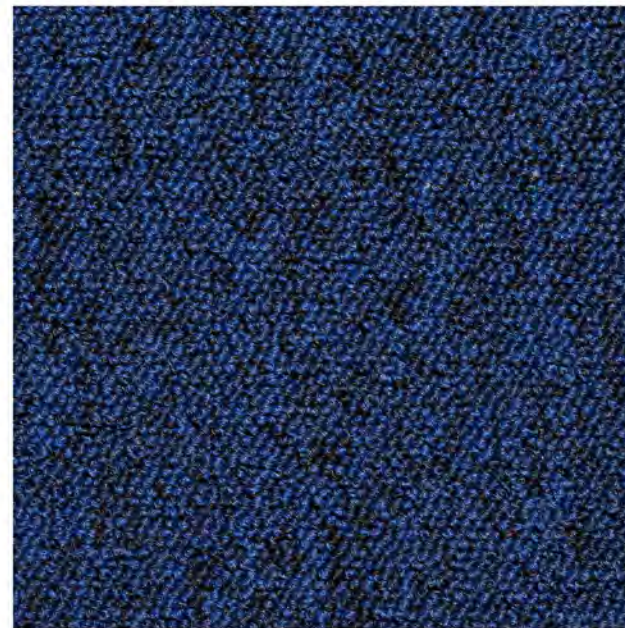

Packshot 83



Packshot 94



Packshot 175



Packshot 293